


## HOOK-UP WIRE TFE TEFLON® INSULATION

MIL-W-16878E (TYPE E)++

UL 1213

200°C, 600 VOLT

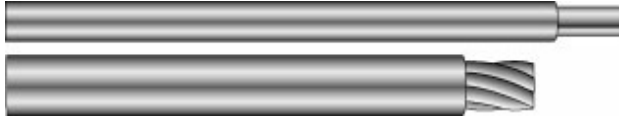

### CERTIFIED PERFORMANCE - HIGH-RELIABILITY

#### TFE TEFLON® INSULATION

Alpha's TFE Teflon wire family includes a full range of sizes, colors, conductor types and voltage ratings for both commercial (UL styles) and high reliability military OEM products.

Alpha's TFE Teflon is rated for continuous operation in temperatures from -60°C to 200°C and retains its exceptional toughness and flexibility within this range. TFE Teflon is not degraded by chemicals which makes it ideal for use in harsh environments. Teflon is widely regarded as the ultimate high performance wire insulation material for environments characterized by extreme thermal or chemical conditions.

#### CHOOSE TFE TEFLON® FOR:

- Resistance to All Chemicals
- High Temperature Use Up To 200°C
- Low Coefficient of Friction
- Outstanding Electrical Properties

#### TFE TEFLON® APPLICATIONS:

- Military Harnessing
- Medical Electronics
- Power Supply Lead Wire
- Appliance Wiring

#### CHARACTERISTICS

##### Operating Temperature:

- -60°C to 200°C (UL 105°C)

##### Voltage Rating:

- 600 Volt (UL: Voltage Not Specific)

##### Product Description:

- Conductor: Stranded or Solid Silver Plated Copper
- Insulation: Color-Coded, Extruded TFE Teflon

#### SPECIFICATIONS

- UL AWM Style 1213
- MIL-W-16878E Types E



Underwriters Laboratories Inc.



Passes  
UL VW-1 Flame Test

Underwriters Laboratories Inc.

#### AVAILABILITY

- 100 ft (30,5m), 1000 ft (305m) put-ups  
1000 ft put-ups may contain multiple lengths

#### HOOK-UP WIRE

#### STRANDED CONDUCTOR

Alpha Part No.	Type Designation	Conductor		Insul. Thickness		Diameter		Stock Colors*
		AWG	Strand	Inches	mm	Inches	mm	
<u>5851</u>	E-30	30	7/38	0.010	0,25	0.032	0,81	1-10
<u>5852</u>	E-28	28	7/36	0.010	0,25	0.036	0,91	1-10
<u>5853</u>	E-26	26	7/34	0.010	0,25	0.040	1,02	1-10
<u>5853/19</u>	E-26	26	19/38	0.010	0,25	0.041	1,04	1-10
<u>5854</u>	E-24	24	19/36	0.010	0,25	0.045	1,14	1-10
<u>5854/7</u>	E-24	24	7/32	0.010	0,25	0.044	1,12	1-10
<u>5855</u>	E-22	22	19/34	0.010	0,25	0.051	1,30	1-10
<u>5855/7</u>	E-22	22	7/30	0.010	0,25	0.055	1,27	1-10
<u>5856</u>	E-20	20	19/32	0.010	0,25	0.059	1,50	1-10
<u>5856/7</u>	E-20	20	7/28	0.010	0,25	0.058	1,47	1-10
<u>5857</u>	E-18	18	19/30	0.010	0,25	0.070	1,78	1-10
<u>5858</u>	E-16	16	19/29	0.010	0,25	0.077	1,96	1-10
<u>5859</u> +	E-14	14	19/27	0.012	0,30	0.094	2,39	1
<u>5859/12</u> +	E-12	12	19/25	0.012	0,30	0.113	2,87	1
<u>5859/10</u> +	E-10	10	37/26	0.012	0,30	0.134	3,40	1

\*See Color Chart Below

### SOLID CONDUCTOR

Alpha Part No.	Conductor AWG	Insul. Thickness		Diameter		Stock Colors*
		Inches	mm	Inches	mm	
<u>2853/1</u>	26	0.010	0,25	0.036	0,91	1-10
<u>2854/1</u>	24	0.010	0,25	0.040	1,02	1-10
<u>2855/1</u>	22	0.010	0,25	0.045	1,14	1-10
<u>2856/1</u>	20	0.010	0,25	0.052	1,32	1-3
<u>2857/1</u>	18	0.010	0,25	0.060	1,52	1-3

\*See Color Chart Below

+Not UL AWM Style 1213

++All product supplied is to the MIL-W-16878 E revision. Revision F product can be supplied upon request, subject to minimum order quantity and lead time requirements.

Teflon® is a registered trademark of E.I. DuPont

*STOCK COLOR CHART				
1-White	3-Red	5-Yellow	7-Brown	9-Gray
2-Black	4-Green	6-Blue	8-Orange	10-Violet(purple)

Tel: 908-925-8000  
Toll-Free: 1-800-52 ALPHA  
Fax: 908-925-6923

IN EUROPE:  
Tel: +44 01932 772422  
Fax: +44 01932 772433

Master Catalog Page



# 160

